



TASK LIGHT


“K-LITE” ID No. 2388 Task light luminaire suitable for 2 Nos. 36 W CFLL lamps. Ideal lighting system for versatile office layouts. Luminaire is suitable for mounting on modular workstation of 24x7 modern offices.

- * Task light luminaire has distinguished look and aesthetic appeal and has been designed keeping the new age technology set ups.
- * Energy saving task light luminaire offers optimum glare control.
- * Sufficient indirect beam spread on the table top only.
- * Brilliant design of task light leads to avoid usage of general lighting in false ceiling during the working hours above the work station and reduce the total cost of ownership. Individual can operate luminaire by switch control provided at the bottom of luminaire.

Applications

- * Software companies, in places like workstation & offices.

Product ID	Wattage	Price
2388	2 x 36W CFLL	INR. 7000/- + tax

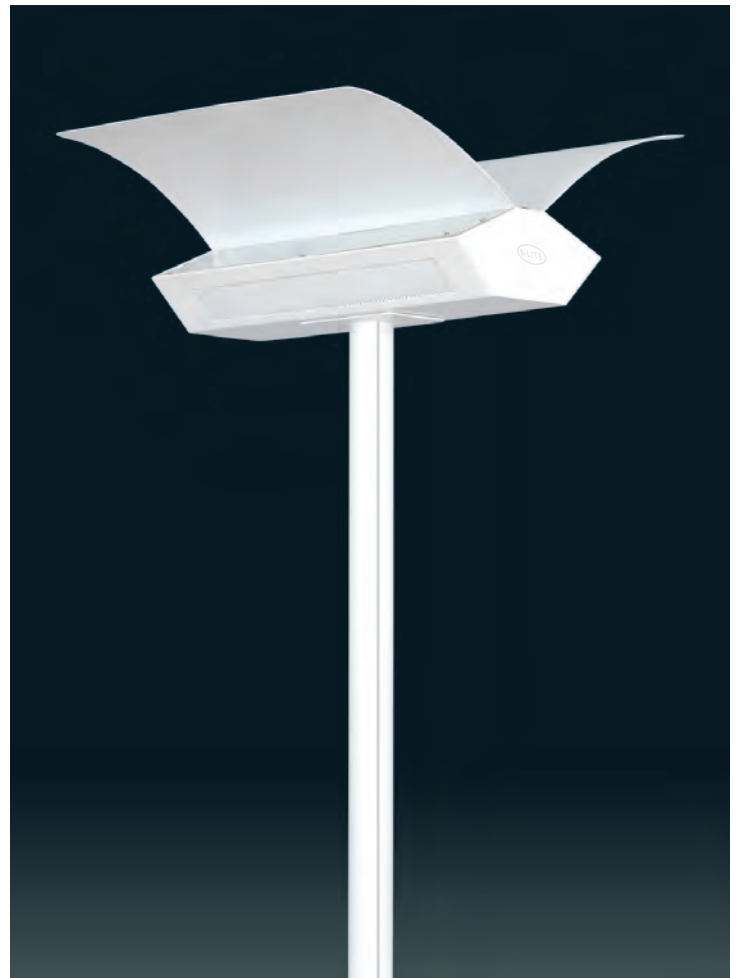

General specification

The luminaire is made of thick gauge C.R.C.A. sheet and finished with white powder coating. Low power loss heavy duty open construction copper ballast, starters, capacitors, connector, four pin holders for universal application are provided. Suitable for mounting on workstation. The support can be taken from the modular frame. (At present available in 90° and 120°)

Elegant Wing

- * For partially up lighting the ceiling and downward lighting.
- * Made of thick gauge CRCA galvano sheet and finished with white powder coated
- * With curved profile and has rows of perforation at bottom.

Reflector

Highly polished and highly anodised mirror reflectors are made of imported origin and provided at bottom of lamps to offer efficient enhanced illumination.

Acrylic diffuser

Clear non-yellowing acrylic covers are provided on top of housing of luminaire to prevent entry of foreign materials and protection to lamps also ensures efficient indirect illumination through the wings provided above the housing of the luminaire. The acrylic cover ensures easy day to day maintenance

Stem

Rectangle profile stem (45mm x 25mm) (900mm long) is screwed to the bottom of the luminaire housing by means 2 nos. SS CSK allen key screws. Stem is provided with ON/OFF Piano switch control at bottom. The luminaire can be mounted on the modular frame. Floor mounting model on request

